




M415D-12V Water Heater for Volumetric Mobile Mixers



- 100% stainless steel wetted parts
- Three pass 1" Sch. 40 heat exchanger
- NEMA 4 watertight electrical enclosure
- Forced air burner
- Safety controls: flow switch, temperature control switch, high temperature limit switch, relief valve
- Designed to heat solutions with a boiling point greater than 300°F
- Skid mounted
- NEMA 4 electrical enclosure
- Safety standards: UL508A/CSA C22.2#14
- 88% efficiency

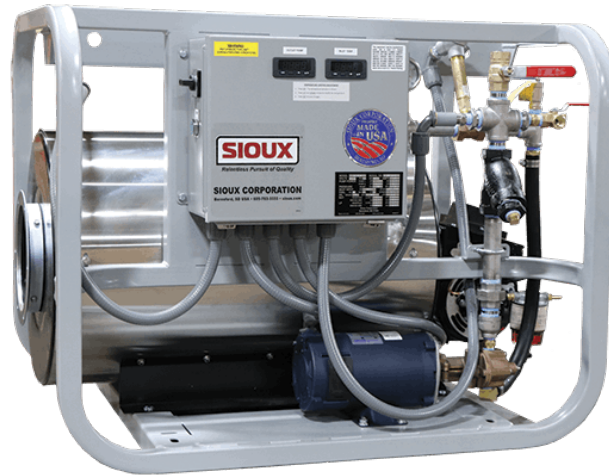

rwmartin.com | 800.635.4363 | info@rwmartin.com

Electrical & Mechanical Information

Voltage	Phase	Hertz	Operating Current Amps	Heat Input BTU/Hr
12				

Connections

Water Inlet	Water Outlet	Fuel Inlet	Flue Size
3/4" NPT	1" NPT	3/8" NPT	

Performance

Heat Output BTU/Hr	Boiler HP	Minimum Water Flow Rate	Maximum Water Flow Rate	Max Achievable Water Tank Temperature
415,000		9	9	150

Fuel Supply

Fuel Type	Fuel Usage
Diesel	

Weight & Dimensions

Length		Width		Height	
in	mm	in	mm	in	mm
53	1,321	42	1,067	38	965
Weight			580 (lbs), 263 (kgs)		

For More Info Visit sioux.com

Sioux Corporation, Copyright 2021 - Subject to change without notice